

Key Features

- Wide spectral range
- High output power
- Good spectral stability
- Highly reliable and durable







Description

Amonics' 2µm ASE light source features high output power, very wide spectral range and high stability against temperature change.

The benchtop version incorporates a user-friendly front panel housing with a LCD monitor display, key switch, power control knob and optical connectors. RS232 or Ethernet computer interface is also equipped.

Application

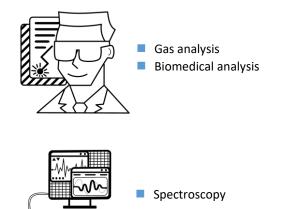

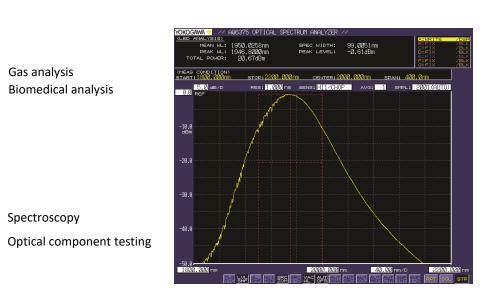



ISO 9001: 2015 Certificate No.: CC 5346 Our product is manufactured under a HKQAA ISO 9001 certified quality management system. The ISO 9001:2015 certification applies to the Hong Kong production site only.

2μm ASE Broadband Light Source



Specifications

Model	ALS-2000-18	
Output Power	Min. 18 dBm	
Min. Spectral Density	-40 dBm/nm	
Spectral Range	1920 nm to 2080 nm	
Output Stability @ APC mode	Max. ± 0.05 dB	
Output Isolation	Min. 30 dB	

General Parameters

	Value	
Operation Temperature	0 to 40 °C	
Storage Temperature	-10 to 70 °C	
Power Supply	90 – 240 VAC, 47 – 63 Hz	
Dimensions	260(W) x 330(D) x 120(H) mm	
Protection	Pump laser (TEC) overheat	
Optical Power Monitoring	Output power	
Mechanical Safety Control	Key-lock switch, BNC interlock key	
Remote Control Port	RS232 / Ethernet	
Optical Connector	FC/APC, FC/UPC, SC/APC, SC/UPC	
Optical Fiber	SMF 1950	

Ordering Information

Product Code	ALS-2000-aa-b-cc	aa : Output power in dBm b : B for Benchtop cc : FA for FC/APC, FC for FC/UPC, SA for SC/APC, SC for SC/UPC
--------------	------------------	---

Amonics undertakes continuous and intensive product development to ensure its product performance at the highest technical standards. As a result, the specifications in this document are subject to change without notice.

Amonics Limited (Hong Kong)

14/F, Lee King Industrial Building, 12 Ng Fong Street, San Po Kong, Kowloon, Hong Kong

Tel :+852 2428 9723 Fax :+852 2428 9704

Beijing Amonics Co. Ltd. (Beijing)

Room 902, Unit 1 Joy Mansion, NO.99 Chaoyang North Road, Beijing China 100123

Tel :+86 10 8478 3386 Fax :+86 10 8478 3396
Email: contact@amonics.com Website: www.amonics.com



